

# ZPM-800 MULTIFUNCTION POWER METER

## DESCRIPTION

The ZPM series Multifunction Power Meter provide high accuracy measurement, display and communication(TCP/IP ,RS485 RTU) of all electrical and power quality parameters, including harmonic measurement up to 31<sup>st</sup> THD(Total Harmonic distortion) or Individual harmonic.

They also have digital inputs and outputs and interface with versatile functions such as remote control, alarm, statistics and records.



## APPLICATIONS

Control panels and Motor, Generator monitoring  
Switchgear distribution systems  
Energy Management  
Power quality analysis

## TECHNICAL SPECIFICATION

PARAMETERS		800B	800C	
Power Measurements	Voltage	V <sub>12</sub> V <sub>23</sub> V <sub>31</sub> V <sub>LL,Avg</sub> V <sub>1</sub> V <sub>2</sub> V <sub>3</sub> V <sub>LN,Avg</sub>	●	●
	Current	I <sub>1</sub> I <sub>2</sub> I <sub>3</sub> I <sub>Avg</sub> I <sub>N</sub>	●	●
	Active Power	P <sub>1</sub> P <sub>2</sub> P <sub>3</sub> ΣP	●	●
	Reactive Power	Q <sub>1</sub> Q <sub>2</sub> Q <sub>3</sub> ΣQ	●	●
	Apparent Power	S <sub>1</sub> S <sub>2</sub> S <sub>3</sub> ΣS	●	●
	Power Factor	PF <sub>1</sub> PF <sub>2</sub> PF <sub>3</sub> PF <sub>Avg</sub>	●	●
	Frequency	Hz	●	●
	Active Energy	WH <sub>Imp</sub> WH <sub>Exp</sub> WH <sub>Total</sub> WH <sub>Net</sub>	●	●
	Reactive Energy	QH <sub>Imp</sub> QH <sub>Exp</sub> QH <sub>Total</sub> QH <sub>Net</sub>	●	●
	Demand	P <sub>md</sub> Q <sub>md</sub> S <sub>md</sub>	●	●
Power Quality	Un-balance	V <sub>unbl</sub> I <sub>unbl</sub>	●	●
	THD for Voltage	THD <sub>V12</sub> THD <sub>V23</sub> THD <sub>V31</sub> THD <sub>V,Avg</sub>	●	●
	THD for Current	THD <sub>I1</sub> THD <sub>I2</sub> THD <sub>I3</sub> THD <sub>I,Avg</sub>	●	●
	Individual Harmonic	2 <sup>nd</sup> ~31 <sup>st</sup>	●	●
	Crest Factor for Volt	Crest Factor		●
I/O	K Factor for Current	K Factor		●
	Max/Mini Recording	Maxi./Mini. Recording for all parameters with time stamp		●
	Digital Input	DI <sub>1</sub> DI <sub>2</sub> *DI <sub>3</sub> *DI <sub>4</sub>	●	●
	Digital Output	*DO <sub>1</sub> *DO <sub>2</sub>	●	●
Relay Output	*RO <sub>1</sub> *RO <sub>2</sub>	●	●	
RS485 Port	Modbus RTU mode	●		
Ethernet Port	TCP/IP Modbus RTU mode		●	

\* means optional, please specify in ordering information.

### Accuracy & Resolutions

PARAMETERS	ACCURACY	RESOLUTION	INPUT RANGE
Voltage	0.2%	0.1%	40~290Vac(V <sub>L-N</sub> )
Current	0.2%	0.02%	1%~120% of Rated I
Neutral Current	1.0%	0.1%	1%~120% of Rated I
Active Power	0.5%	0.1%	0~9999MW
Reactive Power	0.5%	0.1%	0~9999Mvar
Apparent Power	0.5%	0.1%	0~9999MVA
Power Factor	0.5%	0.1%	±0.02~1.00
Frequency	0.2%	0.01Hz	45~65Hz
Active Energy	0.5%	0.1KWh	0~99999999.9KWh
Reactive Energy	0.5%	0.1KVarh	0~99999999.9KVarh
THD	1.0%	0.01%	0~100%
Individual Harmonic	1.0%	0.01%	0~100%
Un-balance	0.5%	0.1%	0~300%

### Input

#### Measurement:

True rms measurement

#### Sampling:

128point/Cycle

#### Connection:

1P2W, 1P3W, 3P3W, 3P4W, Balance/Unbalance; According to the elements of PT and CT, it will be programmed by front keys.

#### Input Range:

**Voltage:** 40~290V L-N / 70~500V L-L

PT ratio(primary) programmable: 100~500000V

PT ratio(secondary) programmable: 100~400V

**Current:** 5A, 1A(Optional)

CT ratio(primary) programmable: 5(1)~10000A

**Frequency:** 45~65Hz

#### Max. Input over capability:

**Voltage:** 2 x rated continuous; 2500V for 1 second

**Current:** 2 x rated continuous; 20 x rated for 1 second

#### Input Burden:

**Voltage:** < 0.2VA, **Current:** < 0.1VA

### I/O functions

The meter offers two digital inputs as standard. Additionally, there is an I/O module available as option. The module offers an extra two digital inputs, two digital outputs, two relay outputs, and a DC aux power (for DI). Please specify the option code in ordering, if that extra I/O is to be request.

#### Digital input(DI):

**standard: 2 points (4 points in optional);**

Photo couple, 5~30V, 20mA maximum

Response time ≤ 300ms

Isolation: 2500Vac

#### Functions:

#### Remote Monitoring

2 points; Photo-MOS, 100Vdc, 50mA (optional)

#### Digital output(DO):

Response time ≤ 300ms

Isolation: 2500Vac

#### Functions:

**There are two mode can be programmed as below:**

#### Energy Mode:

Pulse output represents Imp. Each output can be user programmed to represent Imp/Exp/Total/Net KWh or Imp/Exp/Total/Net KVarh

**Pulse rate divider:** programmable 1~6000(x0.1) KWh(KVarh)/p

**Pulse width:** programmable 1~50( x 20msec)

#### Alarm Mode:

Digital output as Hi or Low Alarm. Each output can be user programmed for any measured value.

On triggering an alarm there will be an output plus record

In EEPROM with time stamp. The alarm mode is set up by

RS485, please refer to operating manual.

**Energized level:** programmable High or Low

**Delay time:** programmable from 0~255\*300ms or Latch

2 relay, FORM-A, 3A/250Vac, 3A/30Vdc (Optional)

Output as Hi or Low Alarm. Each output can be user

programmed for 9 parameters of any 34 measured values.

#### Relay output:

#### Functions:

On triggering an alarm there will be an output plus record in EEPROM with time stamp. The alarm mode is set up by RS485, please refer to operating manual.


**Relay energized can be set to be two type in Normal energized and momentary energized**

**Normal:** the relay will be energized when the measured meets condition of set.  
**momentary:** Relay energized for a period(Ton) and than goes off, when the measured meets condition of set.

**Energized level:** programmable High or Low

**T on time(momentary type):** programmable from 50-3000ms

**Back light on for Alarm:** An Alarm can turn the back-light will be turned on... The on time can be set from 0-120 minutes(0= turn on and continuous).

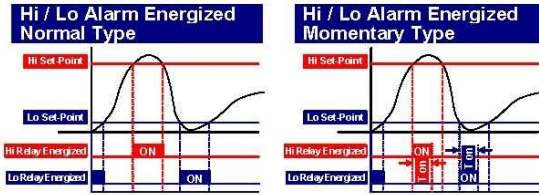

**Remote Control:** Allows a remote computer to directly control the outputs.

**Power Quality**

The instrument gives an evaluation of energy quality by Total Harmonic Distortion, individual Harmonic, Crest Factor of voltage, K Factor of Current, Max/Min stamp, un-balance.

**Harmonic:** 2<sup>nd</sup>-31<sup>st</sup> individual harmonic for Voltage and Current  
**THD:** 2<sup>nd</sup>-31<sup>st</sup> Total harmonic distortion for Voltage and Current  
**K Factor for Current:** K-factor is a weighting of the harmonic load currents according to their effects on transformer heating. A K-factor of 1.0 indicates a linear load (no harmonics). The higher the K-factor, the greater the harmonic Heating effects

**Crest Factor:** The purpose of it calculation is to give an analyst a quick idea of how much impacting is occurring in a waveform.


**Max/Mini stamp:** Custom alarm with time stamping  
**Recording measurements:** V<sub>Un</sub>, V<sub>L1</sub>, I<sub>L</sub>, ΣP, ΣQ, ΣS, THD, Un-balance, Hz, PF, Demand

**Recording period:** Month, Day,  
**Shows Un-balance for Voltage and Current**

**Un-balance:**

**Demand**

For Active, Re-active, Apparent power. They can be calculated in present and maximum value.  
**Demand calculation:** sliding window, one Minute each time  
**Calculation period:** programmable from 1-30 minutes

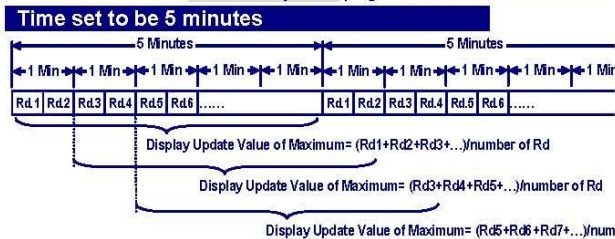

Remark: Sliding Period: 1 time/1 minute

**RS485 communication (standard)**

**Protocol:** Modbus RTU mode  
**Baud rate:** 600/1200/2400/4800/9600/19200/38400  
**Data bits:** 8 bits  
**Parity:** None  
**Stop bits:** 1  
**Address:** 1-247

**Ethernet communication module**

**Connection technology:** RJ45  
**Baud rate:** 10 base T / 100 base T

**Electrical safety**

**Dielectric Strength:** AC 2KV, 50/60Hz, 1 min. Between Input / Output / Power / Case  
**Surge test:** 3KV, 1.2 x 50 μsec. Common mode & differential mode  
**Insulation Res.:** ≥100M ohm, DC 500V  
**Isolation:** Input / Output / Power / Case  
**EMC:** EN 55011:2002; EN 61326:2003  
**Safety(LVD):** EN 61010-1:2001

**Environmental**

**Operating Temp.:** -20 ~ 70 °C  
**Operating Humidity:** 5-95 %RH, Non-condensing  
**Temp. Coefficient:** ≤100 PPM/°C  
**Storage Temperature:** -40~85 °C  
**Enclosure:** Front panel: IEC 549 (IP54); Housing: IP20

**Power**

**Power supply:** AC 85~264 / DC 100~300V  
 DC 20~56V(optional)  
**Power effect:** ≤ 0.05%F.S.  
**Power consumption:** ≤ 3W @ 230Vac  
**Back up memory:** By EEPROM

**Mechanical**

**Dimension:** 96mm(W) x 96mm(H) x 71mm(D)(79mm with I/O module)  
**Panel cutout:** 90mm(W) x 90mm(H)  
**Case material:** White ABS  
**Mounting:** Panel flush mounting  
**Connection:** Screw terminal, Plastic NYLON 66 (UL 94V-0)  
 Current/Voltage input(#1-#10): 1.5~2.5mm<sup>2</sup>(AWG 15-10)  
 Other: 0.5~1.3mm<sup>2</sup>(AWG 22-16)  
**Weight:** Under 400g

**FRONT PANEL**

**Display:** LCD 65x58mm white back light visible under sunshine  
**Reading:** 8888 4 digital x 4 line, 10.0mm high for V, A, Power, Hz, PF, THD, Demand, Unbalance, Max/Mini...  
 888888888 1 line 9 digital, 6.0mm high for Energy, Clock and Date



**I/O Status:**

- DIx Digital Input blight when the DI energized
- DOx Digital Output blight when the DO energized
- ROx Relay Output blight when the RL energized
- Flash when Pulse output
- Flash when RS485 communication. There are two squares that one is for master, another one is for slave. It will be checked easier which side is getting trouble.

**ORDERING INFORMATION**



CODE	MODEL NUMBER	CODE	INPUT RANGE	CODE	DI/DO/Relay	CODE	AUX. POWER
800B	Standard RS485	A5	0 - 5 A	I2 N N N	2 DI (Standard)	AD	AC85~264V / DC100~300V
800C	With individual Harmonic & Max. Demand Ethent	V5	0 - 500 V	I2 N N N	2 DI (4-20mA)	OPTION 4	
				O2 R2 N	4DI,2DO&2RO		
				O2 R2 A4	4DI,2DO&2RO(4-20mA)	D25	DC 20~56V