

ADS/AD/RSS/TE/NPS(4,6 Digits Counter) Series Meter

Product Description


- ◆ Standard input:
 - ADS Series: 2.3", 4"** (0 ~ 1VDC, 0 ~ 5VDC, 0 ~ 10VDC, 0 ~ 10mA, 0 ~ 20mA, 4 ~ 20mA)
 - AD Series: 7"** (0 ~ 1VDC, 0 ~ 5VDC, 0 ~ 10VDC, 0 ~ 10mA, 0 ~ 20mA, 4 ~ 20mA)
 - RSS Series: 2.3", 4"** (RS485 Modbus RTU)
 - TE Series: 2.3", 4"** (T, K, RTD)
 - NPS Series: 4" Counter (Pulse input)**
- ◆ Input Impedance: 62Ω / current, 1Ω / voltage
- ◆ Open response: "000" flashes
- ◆ Display digits: 0 ~ 999 / 0 ~ 9999
- ◆ voltage supply: independent power supply, two-wire transmission, excitation voltage, supply DC12V200mA or DC24V100mA
- ◆ Display Range: Temperature -20 °C ~ 99.9 °C, Humidity 5% RH ~ 99.9% RH
- ◆ accuracy calibration: external Zero Span adjustment
- ◆ Response time: 3 times / second or 0.5 times / sec.
- ◆ Accuracy Correction: + / - 1 %, +/- 1Count




Specification

Type type	ADS/RSS/TE-1306	ADS/RSS/TE-1406	ADS/RSS/TE-1310	ADS/RSS/TE-1410	NPS-1410 NPS-1610	Unit
Display digits	3 digits	4 digits	3 digits	4 digits	4 digits 6 digits	
Digital Dimension	2.3" H57*L32mm		4" H102*L60mm		4" H102*L60mm	cm
Shell Size	H100*L241*D61	H100*L294*D61	H155*L400*D61	H155*L492*D61	H155*L492*D61 H155*L640*D61	mm
Weight	0.9	1.1	1.8	2.4	5.2	KG
Power consumption	2.5	3.3	10.5	14.5	19.5	W
Display range	0~999	0~9999	0~999	0~9999	0~9999	digit
Display Colors	Standard: Red, Other: Yellow, Blue, Green					
Supply voltage	AC90~260V 50/60HZ					
Temperature range	-20°C~60°C					
Shell material	Aluminum, Black					


Exterior

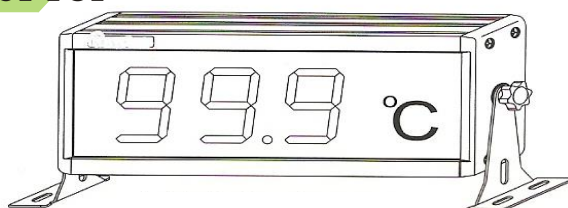


Sitting

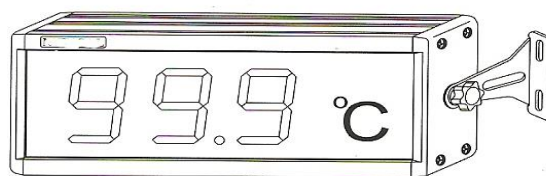

hanging

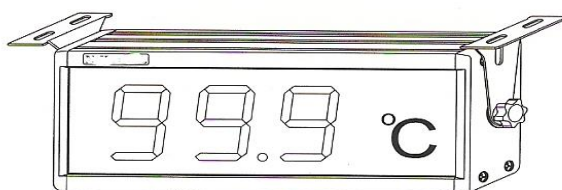

hanging back

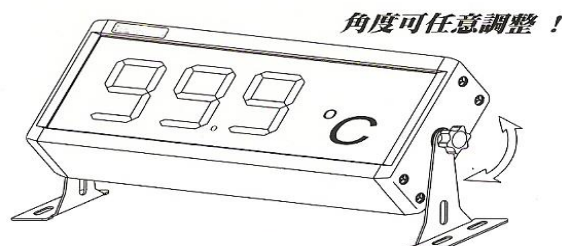

The angle can be adj.